

BOWAY T9C Strong EVA Glue Binding Machine



Usage

Book binding machine

2 times of normal EVA glue in **binding fastness** ,

The **price** is **half of the PUR binding machine** .

250 grams of coated paper binding without nailing , Can be 180 degree open .




Feature


- ◆ **Built in closed EVA glue system**
less smoke and no debris
- ◆ **Auto-side glue**
Machine measure book thickness, and applies correct amount of glue
- ◆ **Smart control, 7 inch touch screen**
Chinese and English Language support, speed, milling cutter, self test diagnostics and manual/auto mode
- ◆ **Patent of workable**
Powerful dust suction system . Cover for storage doubles as a worktable for pages and covers
- ◆ **Open flat**
Brand new cover location device
- ◆ **Brand new heavy-duty design**
Design strengthened in over 30 places which stops deformation makes machine more stable
- ◆ **Patent of prevent clamping hand technolog**
Patented anti trap technology prevents fingers getting trapped in page clamp
- ◆ **Adjustable cover clamping station**
Adapts to different types of covers, lets you adjusts roundness of square ness of spine
- ◆ **End gluing control**
Smart control the gluing on two end of book spine, no need trimming after bind
- ◆ **Powerful dust suction system**
Ensures less waste on work surface and around glue tank, improves binding qualit
- ◆ Easy scoring on-line (**Optional Unit : Y8**, **Creaser Partner : K330C**)

Specification

Page 2 (total : 5 pages)

Model	T9C (special EVA)	T9E(PUR)	T9G(PUR)
Book length	420mm	420mm	420mm
Book thickness	58mm	58mm	58mm
Speed	200-300(book/hour)	200-300(book/hour)	200-300(book/hour)
Glue application	Nozzle, eject	Nozzle, eject	Nozzle,eject
Glue feed	one way hose	one way hose	two independent ways hose
2kgs glue tank	√	√	√
330g glue can	×	×	√
Clean function	×	×	√
Preheating for glue cartridge(330g)	×	×	√
Independent dust absorption	√	√	√
Tidy device	√	√	√
eject smoke system	√	√	√
Glue Melt time	about 35 mins	about 25 mins	about 25 mins
book spine cutting system	Milling+notching	specified PUR cutters	specified PUR cutters
Book clamp	automatical	automatical	automatical
Cover clamp	automatical	automatical	auto matical
Cut folded paper	√	√	√
Display	7" colorful touch screen	7" colorful touch screen	7" colorful touch screen
Clamp adjustment	√	√	√
Open cover clamp plat	√	√	√
work table	√	√	√
Auto gluing control	√	√	√
hands prectect device	√	√	√
power drive	pneumatic + electric	pneumatic + electric	pneumatic + electric
book thickness measure	√	√	√
Creasing unit	Option (Y8)	Option (Y8)	Option (Y8)
Power	AC220V(110V)+-10% 50Hz(60Hz) 3100W	AC220V(110V)+-10% 50Hz(60Hz) 3100W	AC220V(110V)+-10% 50Hz(60Hz) 3100W
Machine size	1520*650*1160mm	1520*650*1160mm	1520*650*1160mm
Net weight	290kgs	290kgs	300kgs

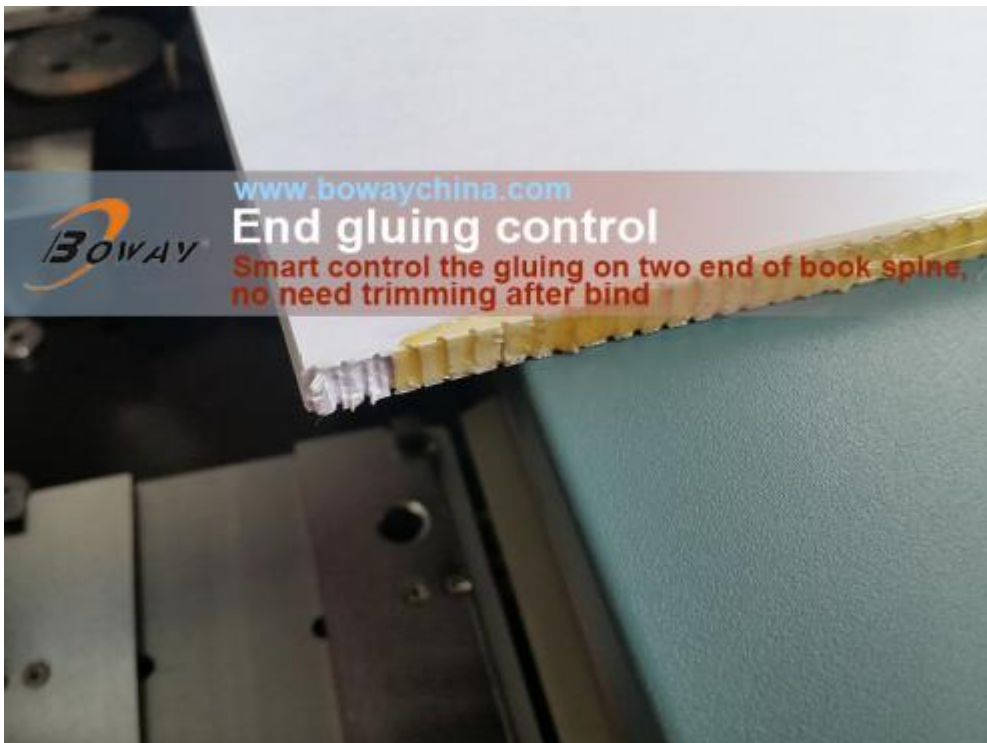

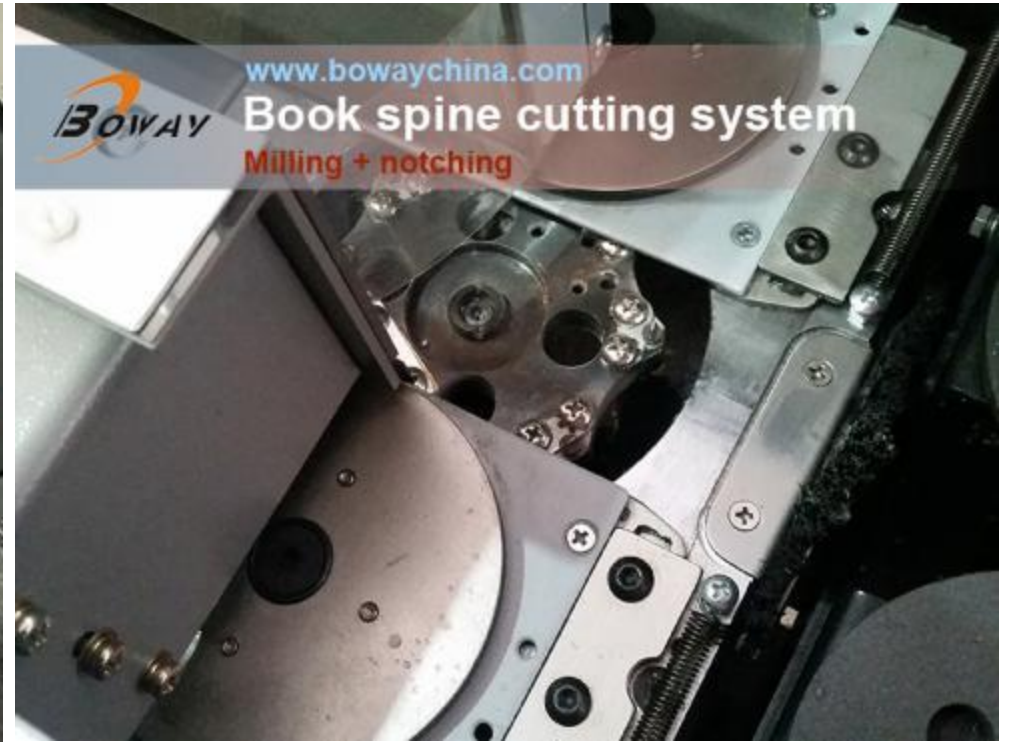



Related Products: Creasing Machine K330C

Hangzhou Fuyang Hupu Hansway (Boway) Trading Co., Ltd.

ADD: NO.1216,GONGYUANXI ROAD, JINQIAO INDUSTRIAL PARK FUYANG, HANGZHOU,CHINA

TEL: +86-571-63368676 +86-571-63168822

+86-571-61718035/8036/8980/8981

FAX: +86 20 28819702-25160

E-MAIL:boway@bowaychina.com

WEBSITE:www.bowaychina.com www.fullar.net



Model	Feed width (mm)	Feed Length (mm)	Paper Weight (g/m ²)	Speed (Sheet/H)	Feeding System	Display Screen	Single Side Crease	Double Side Crease	Perforate	Data Read	Power Supply	Machine Size (mm)	Net Weight (kg)
K330C	165-320	140-999	80-400	8000	Up and down Suction by Pump	7" Touch Screen	√	√	√	√	AC220V(110V)±10% 50Hz(60Hz) 1800W	1600*630*1150	120