

# BOWAY T9E/T9G PUR Glue Binding Machine



## Usage

### Book Binding by Glue

Viscosity of PUR 3 times EVA ,180° open even paper of 1000gsm !

100% prevent PUR glue from air and moisture (T9E,T9G)

PUR-EVA 2 in 1 Perfect Binder (Only T9G)

Free swift between PUR and EVA (Only T9G)

Auto Cleaning-clean your trouble!

Patented design of glue application system

Perfect binding solution for traditional printers and binders,as well as digital & photo industry

No page drop No glue waste So easy to bind !

## Feature

◆ **Built-in closed PUR glue system ( T9E is only for PUR, T9G is for EVA-PUR 2 in 1 )**

Pressurized sealing tank for glue 2kgs and cartridge 330g, both back and side gluing

Two glue tanks for EVA & PUR, easy swift on demand, meanwhile, EVA can be used as cleaner

◆ **Concerning spare parts be Teflon coated**

Eacy to clean

◆ **Mute air pump ensures quite operation for office use**

◆ **Smoke extractor**

Protect work environment.

◆ **Built in closed EVA glue system ( T9C )**

Less smoke and no debris

◆ **Patented nozzle application structure**

Easy to clean.

◆ **Auto-side glue**

Machine measure book thickness, and applies correct amount of glue

◆ **Smart control, 7 inch touch screen**

Chinese and English Language support,speed, milling cutter, self test diagnostics and manual/auto mode

◆ **Patent of workable**

Powerful dust suction system . Cover for storage doubles as a worktable for pages and covers

◆ **Open flat**

Brand new cover location device

◆ **Brand new heavy-duty design**

Design strengthened in over 30 places which stops deformation makes machine more stable

◆ **Patent of prevent clamping hand technolog**

Patented anti trap technology prevents fingers getting trapped in page clamp

Inductive touch to open the book carriage.

◆ **Adjustable cover clamping station**

Adapts to different types of covers, lets you adjusts roundness of square ness of spine

◆ **End gluing control**

Smart control the gluing on two end of book spine, no need trimming after bind

◆ **Powerful dust suction system**

Ensures less waste on work surface and around glue tank, improves binding qualit


◆ **Easy scoring on-line (Optional Unit : Y8, Creaser Partner : K330C )**

On-line work with our Auto-creaser K330C , Auto read out the thickness of book to crease spine lines and opening lines

# Specification

Page 2 ( total : 5 pages)

Model	T9C ( special EVA )	T9E (PUR)	T9G (EVA-PUR 2 in 1)
Book length	420mm	420mm	420mm
Book thickness	58mm	58mm	58mm
Speed	200-300(book/hour)	200-300(book/hour)	200-300(book/hour)
Glue application	Nozzle, eject	Nozzle, eject	Nozzle,eject
Glue feed	one way hose	one way hose	two independent ways hose
2kgs glue tank	√	√	√
330g glue can	×	×	√
Clean function	×	×	√
Preheating for glue cartridge(330g)	×	×	√
Independent dust absorption	√	√	√
Tidy device	√	√	√
eject smoke system	√	√	√
Glue Melt time	about 35 mins	about 25 mins	about 25 mins
book spine cutting system	Milling+notching	specified PUR cutters	specified PUR cutters
Book clamp	automatical	automatical	automatical
Cover clamp	automatical	automatical	auto matical
Cut folded paper	√	√	√
Display	7" colorful touch screen	7" colorful touch screen	7" colorful touch screen
Clamp adjustment	√	√	√
Open cover clamp plat	√	√	√
work table	√	√	√
Auto gluing control	√	√	√
hands prectect device	√	√	√
power drive	pneumatic + electric	pneumatic + electric	pneumatic + electric
book thickness measure	√	√	√
Creasing unit	Option ( Y8 )	Option ( Y8 )	Option ( Y8 )
Power	AC220V(110V)+-10% 50Hz(60Hz) 3100W	AC220V(110V)+-10% 50Hz(60Hz) 3100W	AC220V(110V)+-10% 50Hz(60Hz) 3100W
Machine size	1520*650*1160mm	1520*650*1160mm	1520*650*1160mm
Net weight	290kgs	290kgs	300kgs

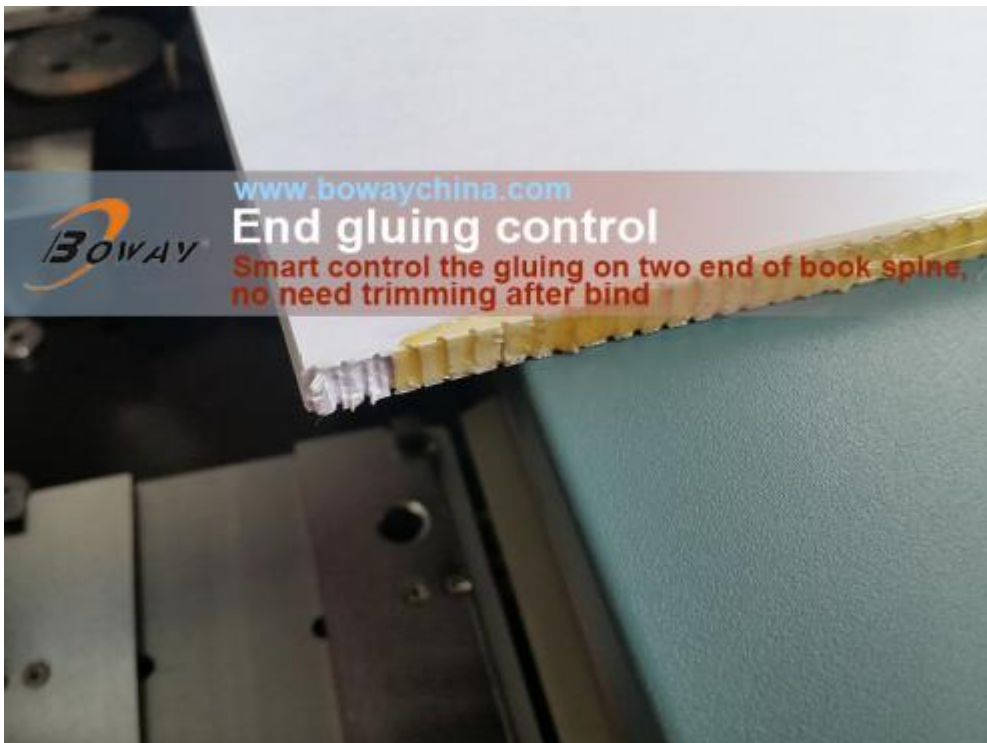



[www.bowaychina.com](http://www.bowaychina.com)

### Patent of workable

Powerful dust suction system  
Cover for storage doubles as a worktable for pages and covers



[www.bowaychina.com](http://www.bowaychina.com)

### Built in closed PUR glue system

Pressurized sealing tank for glue 2kgs and cartridge 330g,  
both back and side gluing


2kgs is for T9E, 2kgs and 330g are for T9G



[www.bowaychina.com](http://www.bowaychina.com)

### Patent of preventing finger

Patented anti trap technology prevents fingers  
getting trapped in page clamp

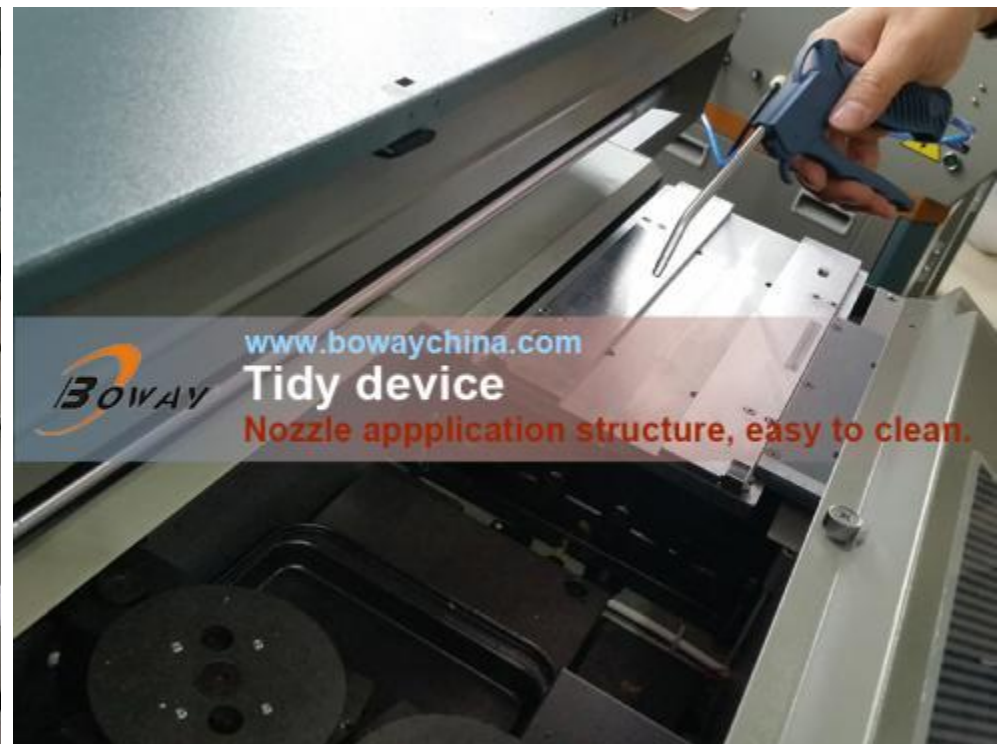

[www.bowaychina.com](http://www.bowaychina.com)

### Tidy device

Nozzle application structure, easy to clean.



**BOWAY** [www.bowaychina.com](http://www.bowaychina.com)  
**Smoke extractor**  
 Protect work environment



**BOWAY** [www.bowaychina.com](http://www.bowaychina.com)  
**Powerful dust suction system**  
 Ensures less waste on work surface and around glue tank improves binding quality.



Smoke extractor,  
 protect work environment.

## Related Products: Creasing Machine K330C



**Hangzhou Fuyang Hupu Hansway (Boway) Trading Co., Ltd.**  
 ADD: NO.1216,GONGYUANXI ROAD, JINQIAO INDUSTRIAL PARK FUYANG,  
 HANGZHOU,CHINA  
 TEL: +86-571-63368676 +86-571-63168822  
 +86-571-61718035/8036/8980/8981  
 FAX: +86 20 28819702-25160  
 E-MAIL:[boway@bowaychina.com](mailto:boway@bowaychina.com)  
 WEBSITE:[www.bowaychina.com](http://www.bowaychina.com) [www.fullar.net](http://www.fullar.net)

Model	Feed width (mm)	Feed Length (mm)	Paper Weight (g/m <sup>2</sup> )	Speed (Sheet/H)	Feeding System	Display Screen	Single Side Crease	Double Side Crease	Perforate	Data Read	Power Supply	Machine Size (mm)	Net Weight (kg)
K330C	165-320	140-999	80-400	8000	Up and down Suction by Pump	7" Touch Screen	√	√	√	√	AC220V(110V)±10% 50Hz(60Hz) 1800W	1600*630*1150	120